


MP150EP

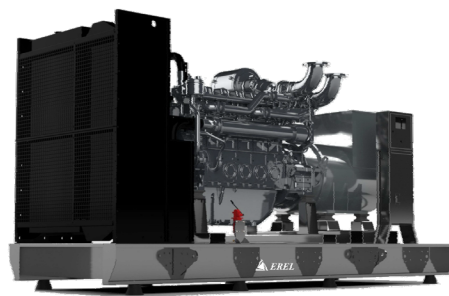

Output Rating

Voltage	Frequency		Standby	Prime
400 V	50 Hz	KVA	165	150
		KW	132	120

Rating Definitions

Ratings are in accordance with ISO 8528, ISO 3046, BS 5514.

Prime Rating

Applicable for supplying continuous electrical power (no limitation to annual hours of operation), at variable load, in lieu of utility power network; 10% overload is permitted for 1 hour in every 12 hours.

Standby Rating

Applicable for supplying continuous electrical power, at variable load, in the event of a utility power failure; no overload is permitted on standby ratings.

Standard Reference Conditions

Standard reference conditions 25°C (77°F) Air Inlet Temp, 100m (328 ft) A.S.L. 30% relative humidity.

General Data

Engine Make	Perkins
Engine Model	1106A-70TAG2
Alternator Make	Stamford
Alternator Model	UCI 274F
Control Unit	DSE 7x20
Engine Speed: RPM	1500
Fuel Tank Capacity (l)	275
Fuel Consumption Standby (l/hr)	36.1
Fuel Consumption Prime (l/hr)	33.4
Fuel Consumption 75% (l/hr)	24.7
Fuel Consumption 50% (l/hr)	16.4



Optional Features and Customization

Optional Features and Customization include:

- Weather and sound proof enclosure
- Stand-alone control panel
- Synchronizing panel
- Load sharing
- Residential silencer
- CE certification
- LV Circuit Breaker


Dimensions and Weights

	Length (mm)	Width (mm)	Height (mm)	Weight (Kg)	
				Dry	Wet
Open Set	2300	840	1600	1344	1400
Canopied Set	3200	1131	1787	TBC	TBC

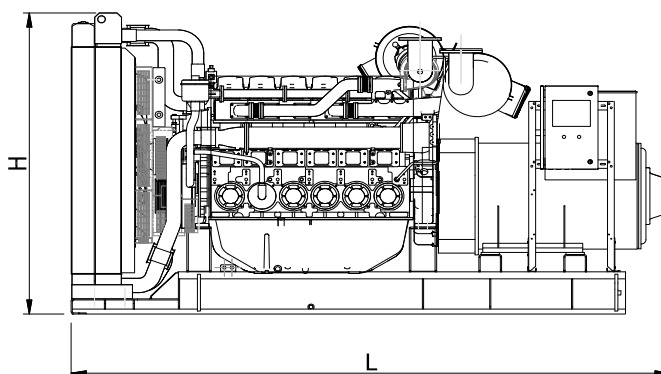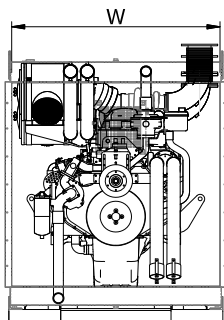

• Dimensions and weights are for guidance only. Certified drawings are available upon request. Specifications may change without notice.

MP150EP

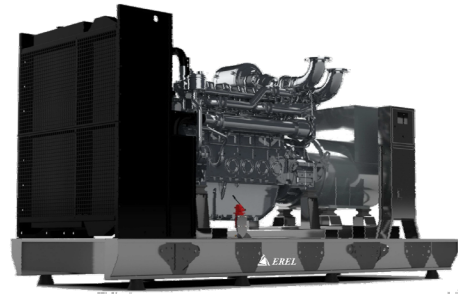

Engine Data

Engine Model		1106A-70TAG2
No. of Cylinders		6 Vertical
Alignment		in-line
Cycle		4 stroke
Bore	mm (in)	105 (4.13)
Stroke	mm (in)	135 (5.31)
Induction		TC AA
Cooling Method		Water
Governing Type		Mechanical
Governing Class		ISO 8528 G2
Compression Ratio		16.0 : 1
Displacement	L (cu.in)	7.0 (427.8)
Moment of Inertia	kg m ²	1.53
Voltage	VDC	12
Ground		Negative
Battery Charger Amps		65
Engine Weight Dry	Kg (lb)	788 (1737)
Engine Weight Wet	Kg (lb)	822 (1812)

Engine Performance Data

Engine Speed	rpm	1500
Gross Engine Power Prime	kW (hp)	136
Gross Engine Power Standby	kW (hp)	153
BMEP Prime	kPa (psi)	1551.0 (225.0)
BMEP Standby	kPa (psi)	1701.0 (246.7)

Air System

Combustion Air Flow Prime	m ³ /min	14.4
Combustion Air Flow Standby	m ³ /min	15.0
Max. Combustion Air Intake Restri	kPa	3.0

Alternator Physical Data

No. of Bearings		1
Insulation Class		H
Winding Pitch		2/3
Winding Code		N.A.
Wires		12
Ingress Protection Rating		IP23
Excitation System		Shunt
AVR Model		SX460
Radio Interference Suppression		EN61000-6

Fuel System

Recommended Fuel		Class A2 Diesel
Fuel Consumption Prime (110%)	l/hr	36.1
Fuel Consumption Prime (100%)	l/hr	33.4
Fuel Consumption Prime (75%)	l/hr	24.7
Fuel Consumption Prime (50%)	l/hr	16.4
Fuel Consumption Standby (110%)	l/hr	N.A.
Fuel Consumption Standby (100%)	l/hr	36.1
Fuel Consumption Standby (75%)	l/hr	28.1
Fuel Consumption Standby (50%)	l/hr	18.9
Fuel Consumption Continuous	l/hr	N.A.

(Based on diesel fuel with a specific gravity of 0.86 and conforming to BS2869 class A2, EN590)

Cooling System

Cooling System Capacity	(l)	21.0
Heat Radiation to Room*: Prime	kW	20.0
Heat Radiation to Room*: Standby	kW	22.3
Radiator Fan Load	kW	4.5
External Restriction to Airflow	Pa	125

Lubrication System

Oil Filter Type		Spin-on, Full flow
Total Oil Capacity	(l)	18.0
Oil Pan Capacity:	(l)	16.5
Oil Type		SAE 15W40
Oil Cooling Method		Water

Exhaust System

Maximum Allowable Back Pressur	kPa	6.0
Exhaust Gas Flow: Prime	m ³ /min	23.9
Exhaust Gas Flow: Standby	m ³ /min	25.5
Exhaust Gas T°: Prime	°C	550
Exhaust Gas T°: Standby	°C	550

Alternator Operating Data

Overspeed	rpm	2250
Voltage Regulation: (Steady state)	%	±1
Total Harmonic content	%	<5
Short Circuit Capacity	%	>300
Reactance (Xd)	%	211
Reactance (X'd)	%	19
Reactance (X''d)	%	13

• Dimensions and weights are for guidance only. Certified drawings are available upon request. Specifications may change without notice.